

Membrane Element Replacement

Replacement of Membrane Element Model 6995 Membrane Air Dehydrator

WARNING


Failure to depressurize the dehydrator air system may result in personal injury or death. To prevent trapping air pressure inside the unit, wait until all sound of air has stopped and the pressure gauge reads zero before moving any other valves.

- a. Close the external inlet and outlet valves. This stops air flow through the dehydrator.
- b. Turn the power-on switch OFF. This stops electric power to the humidity alarm system. The unit is now turned off.
- c. Disconnect the inlet manifold assembly (1) from the top and the outlet manifold assembly (2) from the bottom of the membrane element (3), and the purge manifold assembly (4) from the bottom rear.

NOTE

If access is limited to the sides and rear of the unit, it may be necessary to remove several membranes to access the purge fittings on the others.

- d. Loosen the bolts (5) securing the membrane hold-down clamps (6).
- e. Remove the U-bolt clamps (7) securing the element to the frame and remove the element.
- f. To gain the clearance needed for the new membrane element, remove the bottom saddle and reinstall it upside-down, as shown in the illustration.
- g. Install the new element in the frame.
- h. Reconnect the outlet (2) and purge (4) manifolds to their fittings, using new O-rings M83248/2-015 (8) and M83248/2-011 (9) (supplied with new manifold).
- i. Reconnect the inlet manifold (1) to its fitting, using a new O-ring M83248/2-015 (8) (supplied with new manifold).
- j. Retighten the hold-down clamp (6) and the U-bolt clamps (7).

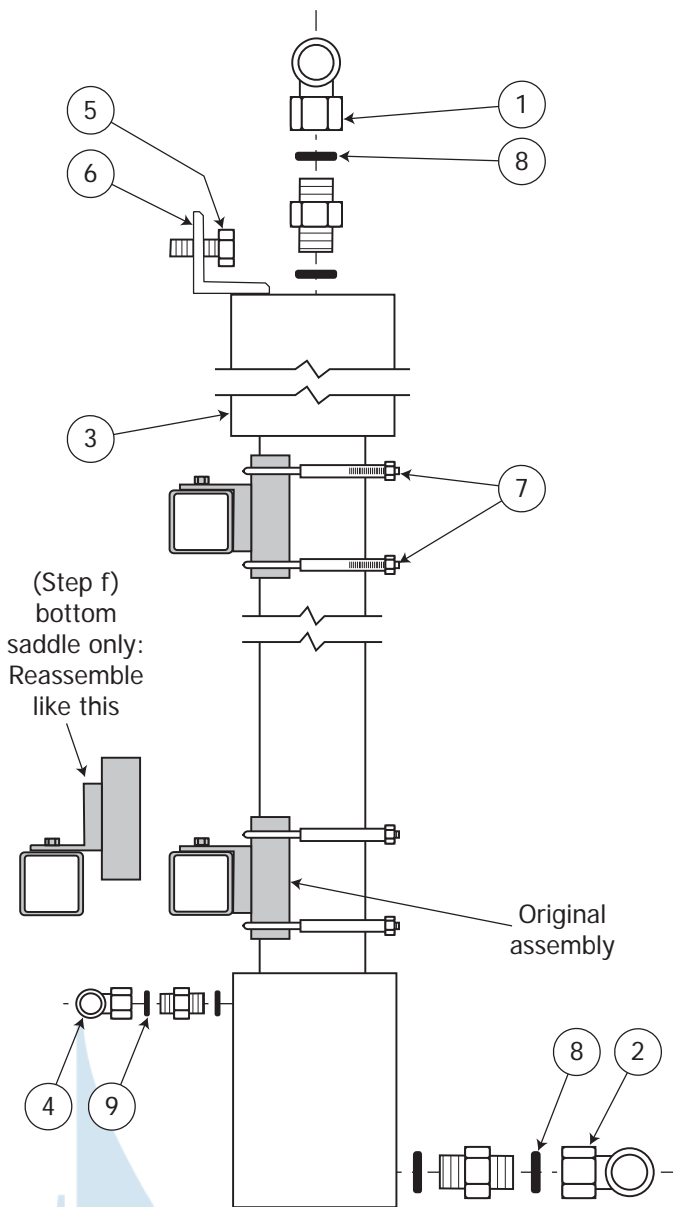

See parts list on reverse.

Howell Laboratories, Inc.

188 Harrison Rd.
Bridgton, Maine 04009
(207) 647-3327

(888) 744-8359

FAX (207) 647-8273

e-mail: contracts@howelllabs.com

web: www.howelllabs.com

An Employee-Owned Company

Certified to ISO 9001

Parts List for Replacement 7001-G501 Membrane Element

NOTE

Replacement element assembly is NSN 4440-01-459-4300.

Item No.	Part No.	Description	Existing on Unit	Supplied with Assembly
1	7051-G502	Inlet Manifold	1	
2	7084-G502	Outlet Manifold	1	
3	7001-G501	Membrane Element Assembly		1/element
4	7085-G502	Purge Manifold	1	
5	Hardware	3/8-16 Stainless	1 set/element	
6	7076-01	Hold-Down Clamp	1/element	
7	7142-01	U-Bolt Clamp	4/element	
8	M83248/2-015	O-Ring		2/element
9	M83248/2-011	O-Ring		1/element
10	7075-G501	Saddle Assembly	2/element	
11	70071-G501	Dehydrator Frame Assembly	1	
12	5075-59-8-8	Fitting		2/element
13	7083-G501	Purge Orifice Assembly		1/element
14	M83248/2-908	O-Ring		2/element
15	M83248/2-904	O-Ring		1/element